METRO LIGHT & POWER

M-POWER-4T
AC POWER & DATA CONNECTIVITY SOLUTION
4T-AUAR-BZ5AAB

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:
Custom Finishes Available

ANTIQUED ARCHITECTURAL BRONZE (ABS)
M-POWER-4T-AUAR-BZ5AAB

A U A R
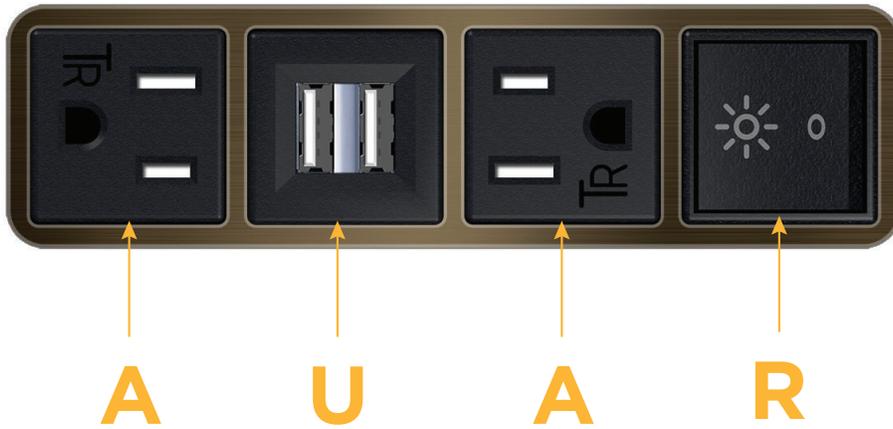
Features:

Module/Port Options:

A	Tamper Resistant AC Receptacle
B	USB-A & USB-C (3.0A USB-A / 15W USB-C)
U	Double USB (Fast Charging Ports - Rated for 3.2A)
D	AC Dimmer
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch
C	USB-C (27W High Speed Charging Port)
Z	USB-C (18W High Speed Charging Port)
R	Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug
Optional Standard Straight 120 VAC Plug
Optional Straight 120 VAC Pass-through Plug

Shown in Antiqued Architectural Bronze (ABS) Bezel, featuring 2 Tamper Resistant ACs, 1 Double USB-A Charging Port, and 1 Switched AC (Rocker Switch).

- **CLEAN, COMPACT DESIGN**
- **STREAMLINED**
- **LOW PROFILE**
- **SIDE-EXITING CORDS**
- **PLUG & PLAY**
- **3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES**
- **6' AC CORD & PLUG (FLAT PLUG STANDARD)**
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- **15A**

c(UL)us
LISTED
E491161

METRO
LIGHT & POWER

M-POWER-4T
AC POWER & DATA CONNECTIVITY SOLUTION
4T-AUAR-BZ5AAB

Specs:

Modules/Ports:

A Tamper Resistant AC Receptacle

U Double USB (Fast Charging Ports - Rated for 3.2A)

R Switched AC (Rocker Switch)

A U R
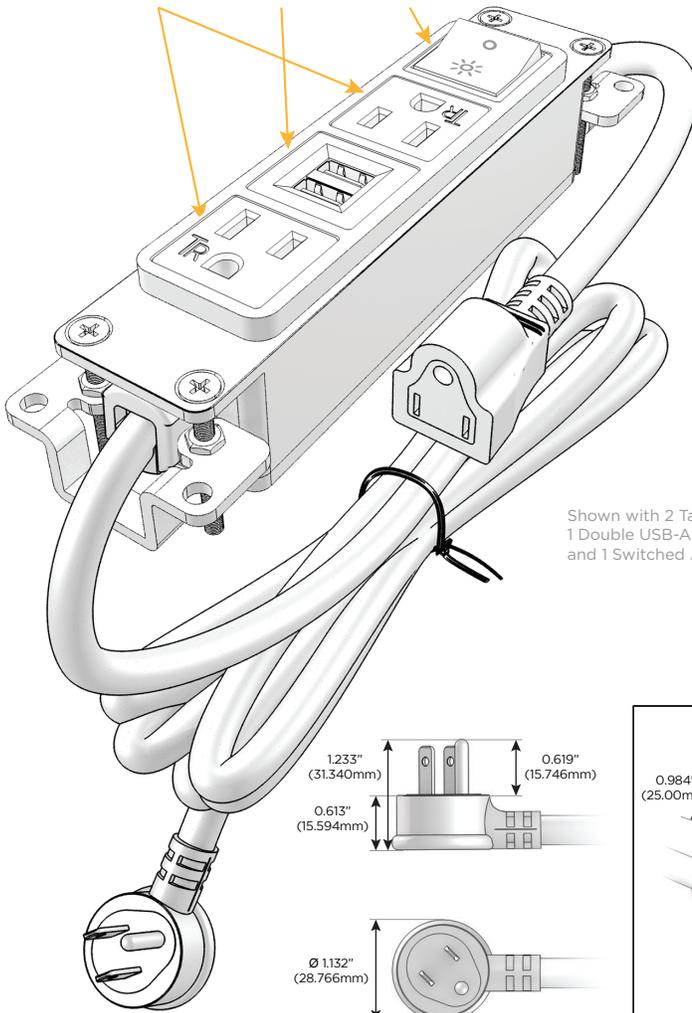
Shown with 2 Tamper Resistant ACs,
1 Double USB-A Charging Port,
and 1 Switched AC (Rocker Switch).

TOP

1.381" (35.082mm)

2.106" (53.503mm)

5.101" (129.582mm)

6.811" (173.000mm)

7.559" (192.003mm)

1.233" (31.340mm)

0.619" (15.746mm)

0.613" (15.594mm)

Ø 1.132" (28.766mm)

Optional Straight 120 VAC Pass-through Plug

0.984" (25.00mm)

1.141" (29.00mm)

1.704" (43.300mm)

2.515" (63.900mm)

0.234" (5.944mm)

0.118" (3.000mm)

1.381" (35.082mm)

1.606" (40.800mm)

1.840" (46.744mm)

END

1.555" (39.503mm)

SIDE

0.905" (23.000mm)

c(UL)us
LISTED
E491161