

M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

4T-AUCX-R7ATE

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Elmsford, NY 10523 **914-699-0101**

sales@mormax.com


Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish:

STANDARD BRONZE (ABS)

Custom Finishes Available M-

M-POWER-4T-AUCX-BZATP

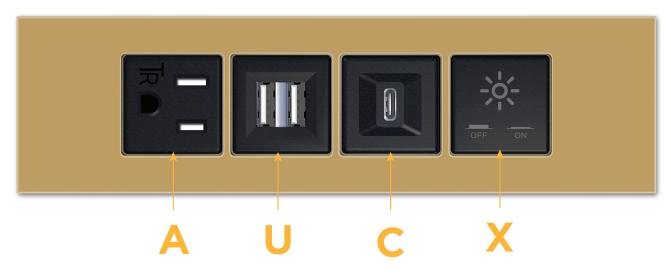

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

Shown in Standard Bronze (ABS) Plate, featuring 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB-C Charging Port, and 1 Switched AC.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 18W HIGH SPEED USB-C CHARGING FOR ALL DEVICES
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





Mormax Company, Inc.

SIDE

0.905" (23.000mm)

914-699-0101 sales@mormax.com

mormax.com

8 Westchester Plaza Elmsford, NY 10523

TOP Specs: Modules/Ports: 2.000" (50.800mm) Tamper Resistant AC Receptacle 2.106" (53.503mm) Double USB (Fast Charging Ports - Rated for 3.2A) Z USB-C (18W High Speed Charging Port) Switched AC 7.240" (183.903mm) (192.003mm) Shown with 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB-C Charging Port, 1 Switched AC. Optional Straight 120 VAC 0.619" (15.746mm) 0.984" (25.00mm (29.00mm) 0.613" (15.594mm) 1.704" (43.300mm) Ø 1.132" (28.766mm) 2 515" 2.000" (50.800mm) 0.093" (2.381mm) 0.140" (3.563mm) 0.234" (5.944mm) 0.118" (3.000mm) 1 .840" (46.744mm) END

1.555" (39.503mm)