METRO LIGHT & POWER

M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION
5T-ABABR-BAB

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:
Custom Finishes Available

BLACK (ABS)
M-POWER-5T-ABABR-BAB

A   B   A   B   R

Features:

Module/Port Options:	
A	Tamper Resistant AC Receptacle
B	USB-A & USB-C (3.0A USB-A / 15W USB-C)
U	Double USB-A (Fast Charging Ports - Rated for 3.2A)
D	AC Dimmer
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch
C	USB-C (27W High Speed Charging Port)
Z	USB-C (18W High Speed Charging Port)
R	Switched AC (Rocker Switch)
Plug:	
	Supplied with Low Profile Flat 45° Angle 120 VAC Plug
	Optional Standard Straight 120 VAC Plug
	Optional Straight 120 VAC Pass-through Plug

Shown in Black (ABS) Bezel, featuring 2 Tamper Resistant ACs, 2 USB-A & 2 USB-C Charging Ports, and 1 Switched AC (Rocker Switch).

- **CLEAN, COMPACT DESIGN**
- **STREAMLINED**
- **LOW PROFILE**
- **SIDE-EXITING CORDS**
- **PLUG & PLAY**
- **3.0A USB-A / 15W USB-C HIGH SPEED CHARGING FOR ALL DEVICES**
- **6' AC CORD & PLUG (FLAT PLUG STANDARD)**
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- **15A**

c UL us
LISTED
E491161

METRO LIGHT & POWER

M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION
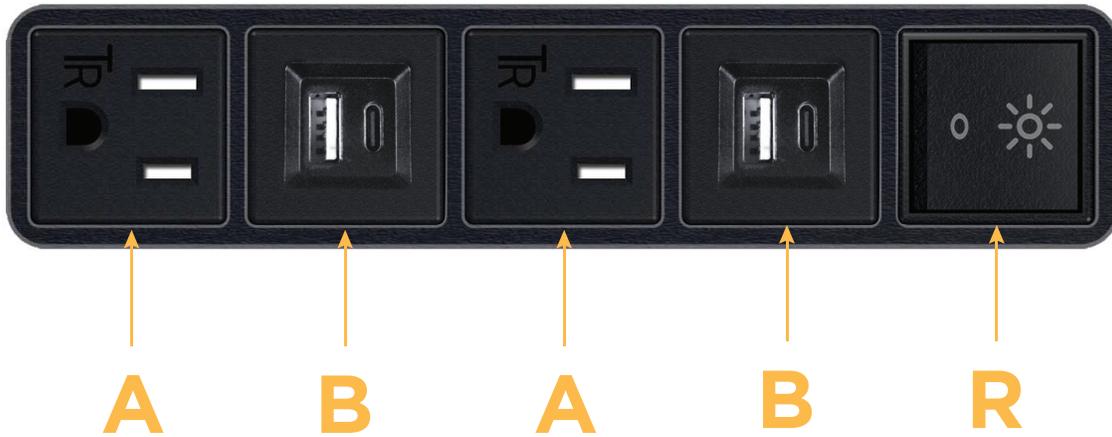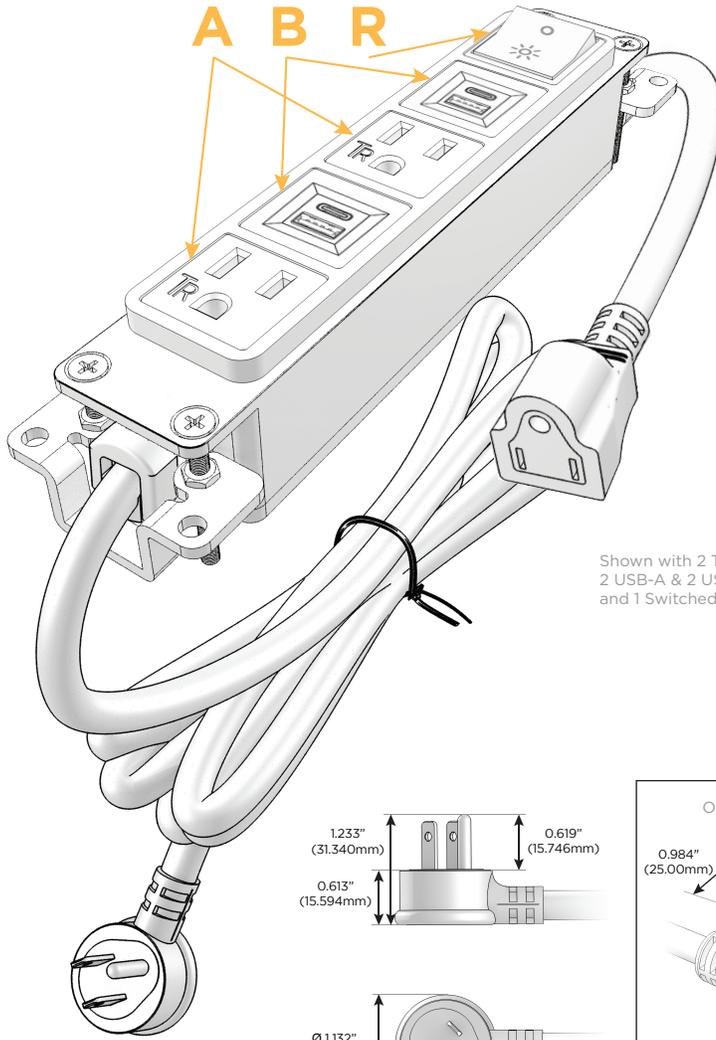5T-ABABR-BAB

Distributed by

MORMAX

Mormax Company, Inc.
8 Westchester Plaza
Elmsford, NY 10523

☎ 914-699-0101
✉ sales@mormax.com
🔗 mormax.com

Specs:

Modules/Ports:

A Tamper Resistant AC Receptacle

B USB-A & USB-C (3.0A USB-A / 15W USB-C)

R Switched AC (Rocker Switch)

A B R

Shown with 2 Tamper Resistant ACs,
2 USB-A & 2 USB-C Charging Ports,
and 1 Switched AC (Rocker Switch).

TOP

1.381" (35.082mm)
2.106" (53.503mm)

6.341" (161.082mm)
8.051" (204.500mm)
8.799" (223.503mm)

1.233"
(31.340mm)
0.619"
(15.746mm)
0.613"
(15.594mm)

Ø 1.132"
(28.766mm)

Optional Straight 120 VAC
Pass-through Plug

0.984"
(25.00mm)
1.141"
(29.00mm)
1.704"
(43.300mm)
2.515"
(63.900mm)

0.234" (5.944mm)
0.118" (3.000mm)

END

1.381" (35.082mm)
1.606" (40.800mm)
1.840" (46.744mm)
1.555" (39.503mm)

SIDE

0.905" (23.000mm)

c**UL**us
LISTED
E491161