METRO LIGHT & POWER

M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION
5T-AUZAR-CRAB

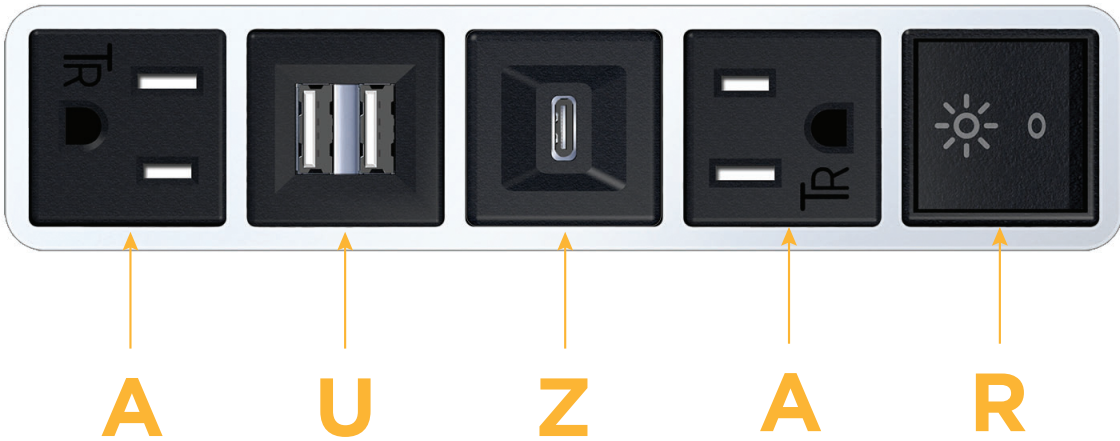Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:
Custom Finishes Available

CHROME (ABS)
M-POWER-5T-AUZAR-CRAB

A U Z A R

Features:

Module/Port Options:	
A	Tamper Resistant AC Receptacle
U	Double USB (Fast Charging Ports - Rated for 3.2A)
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch
C	USB-C (27W High Speed Charging Port)
Z	USB-C (18W High Speed Charging Port)
R	Switched AC (Rocker Switch)
Plug:	
	Supplied with Low Profile Flat 45° Angle 120 VAC Plug
	Optional Standard Straight 120 VAC Plug
	Optional Straight 120 VAC Pass-through Plug

Shown in Chrome (ABS) Bezel, featuring 2 Tamper Resistant ACs, 1 Double USB Charging Port, 1 USB-C Charging Port and 1 Switched AC (Rocker Switch).
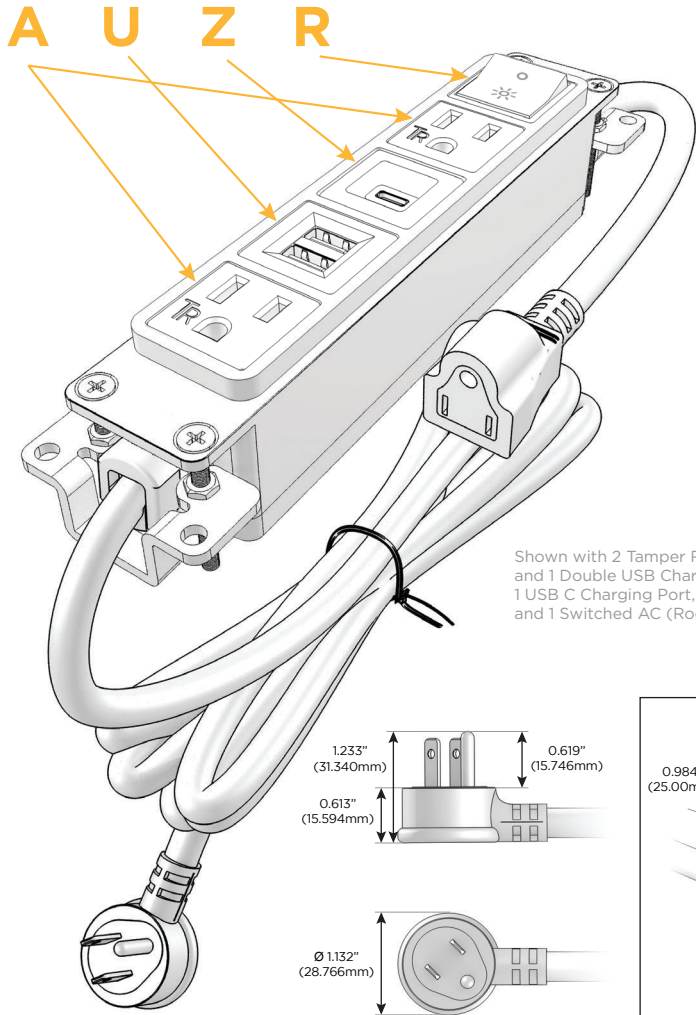
• **CLEAN, COMPACT DESIGN**

• **STREAMLINED**

• **LOW PROFILE**

• **SIDE-EXITING CORDS**

• **PLUG & PLAY**

• **18W HIGH SPEED USB-C CHARGING FOR ALL DEVICES**

• **3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES**

• **6' AC CORD & PLUG (FLAT PLUG STANDARD)**

• **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**

• **UL LISTED FOR MOUNTING IN FURNITURE**

• **15A**

c(UL)us
LISTED
E491161

M-POWER-5T
AC POWER & DATA CONNECTIVITY
SOLUTION 5T-AUZAR-CRAB

Specs:

Modules/Ports:

A Tamper Resistant AC Receptacle

U Double USB (Fast Charging Ports - Rated for 3.2A)

Z USB-C (18W High Speed Charging Port)

R Switched AC (Rocker Switch)

A   U   Z   R

Shown with 2 Tamper Resistant ACs,
and 1 Double USB Charging Port,
1 USB C Charging Port,
and 1 Switched AC (Rocker Switch).

TOP

1.381" (35.082mm)
2.106" (53.503mm)

6.341" (161.082mm)
8.051" (204.500mm)
8.799" (223.503mm)

1.233" (31.340mm)
0.619" (15.746mm)
0.613" (15.594mm)

Ø 1.132" (28.766mm)

Optional Straight 120 VAC Pass-through Plug

0.984" (25.00mm)
1.141" (29.00mm)
1.704" (43.300mm)
2.515" (63.900mm)

END

1.381" (35.082mm)
1.606" (40.800mm)
1.840" (46.744mm)
1.555" (39.503mm)

SIDE

0.234" (5.944mm)
0.118" (3.000mm)
0.905" (23.000mm)

c UL us
LISTED
E491161