M-POWER-5T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AUAD-BTP

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish: **BLACK POWDER COATED (STEEL)**
Custom Finishes Available
M-POWER-5T-AUAD-BTP

Features:

Module/Port Options:

A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	HDMI
D	CAT 6
E	3.5mm Mini Stereo Jack
F	Single USB (Fast Charging Port - Rated for 3.2A)
G	RJ 12
H	Switched AC
I	3-Way Switch
J	USB C (High Speed Charging Port)
K	Switched AC (Rocker Switch)
L	AC Dimmer

Plug:

	Low Profile Flat 45° Angle 120 VAC Plug
	Standard Straight 120 VAC Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- ETL LISTED FOR MOUNTING IN FURNITURE
- 15A
- 0% TO 100% DIMMING

Shown in Black Powder Coated (Steel) Trim Plate, featuring 2 Tamper Resistant ACs, 1 Double USB Charging Port, and 1 AC Dimmer.

ETL LISTED
Intertek

M-POWER-5T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AUAD-BTP

Mormax Company, Inc.
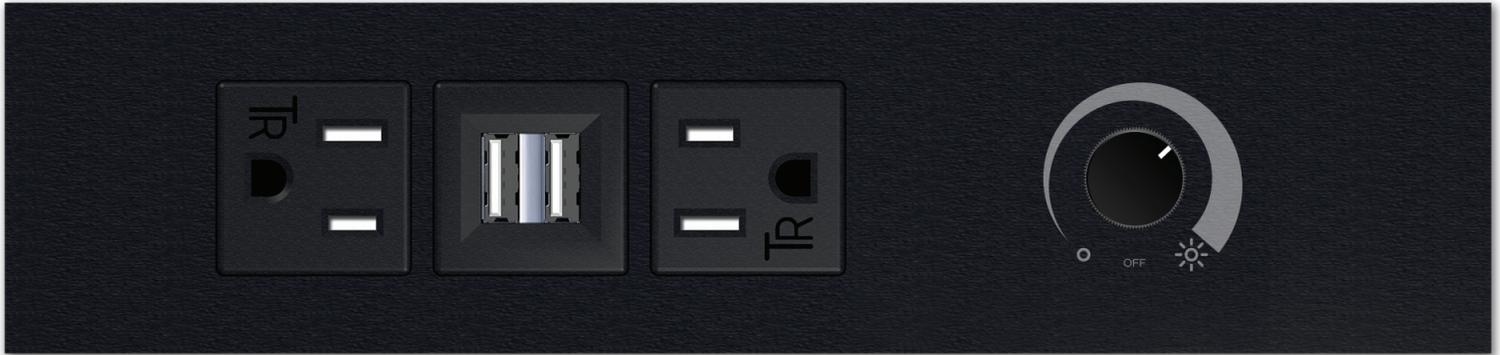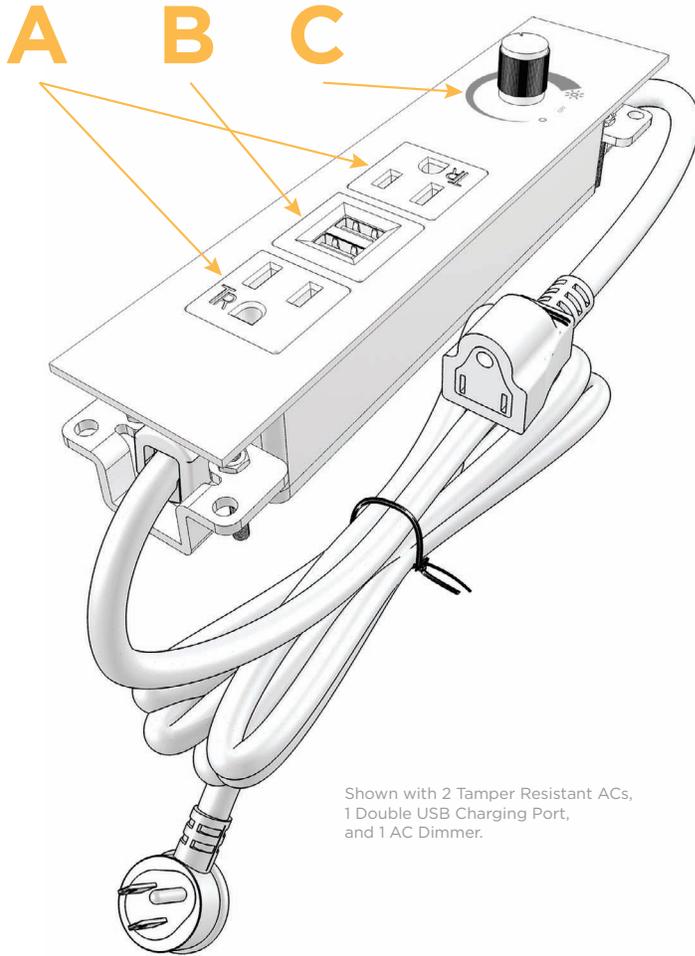8 Westchester Plaza
Elmsford, NY 10523

914-699-0101
sales@mormax.com
mormax.com

MORMAX

Specs:

Modules/Ports:

A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	AC Dimmer

Shown with 2 Tamper Resistant ACs,
1 Double USB Charging Port,
and 1 AC Dimmer.

TOP

2.000" (50.800mm)
2.106" (53.503mm)
8.480" (215.403mm)
8.799" (223.503mm)

END

2.000" (50.800mm)
0.582" (14.800mm)
0.669" (17.000mm O.D.)
1.606" (40.800mm)
1.840" (46.744mm)
1.555" (39.503mm)

SIDE

0.093" (2.381mm)
0.140" (3.563mm)
0.118" (3.000mm)
0.234" (5.944mm)
0.905" (23.000mm)

ETL Listed
Intertek